

# FB29 track

For boats  
from 80 to 100 ft



The FB29 track is made for Fibreball system FB29.190 on page 151.

## Mod. FB29.13 END FITTING

Made in aluminium, should be attached to the mast with the 2 X 8 mm screws.

## Mod. FB29.12 JOINT



In order to ensure proper alignment the section of the track will be joined together with this nylon fitting: it is supplied with 2 screws.

## SLUGS

Available on request, for 8 mm screws.

## Mod. FB29.15 INSTALLATION TOOL

It is necessary to position the slugs with the mast in vertical position; with tracks mod. FB29.221.

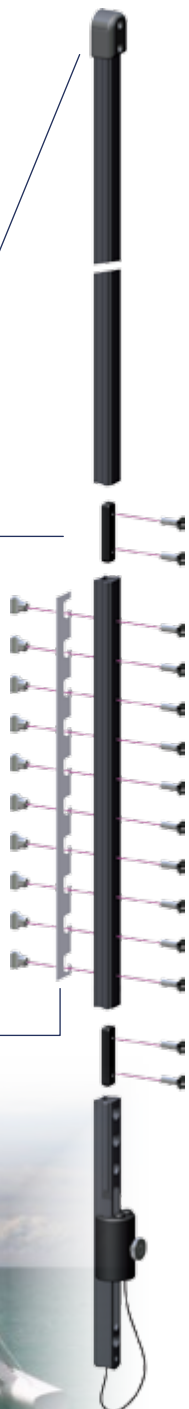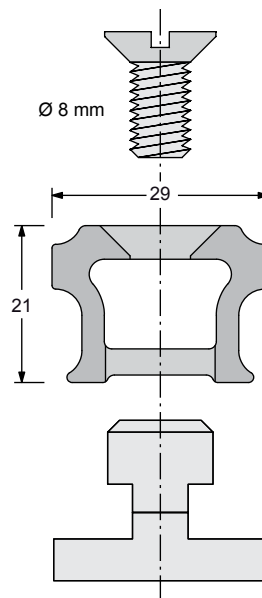

## TRACK

Aluminium profile hard black anodized and teflon coated. Weight = 0.72 kg/m

MODEL	HOLE SPACING	LENGTH
-------	--------------	--------

### DIRECT MOUNTING

FB29.311	100 mm	3 m
----------	--------	-----

### SLUG MOUNTING VERTICAL MAST

FB29.221	100 mm	2 m
----------	--------	-----

### SLUG MOUNTING HORIZONTAL MAST

FB29.321	100 mm	3 m
----------	--------	-----

Direct mounting requires drilling and tapping holes in the mast, slug mounting does not.

## Mod. FB29.11 LOADER

It allows the cars to be easily loaded and unloaded.

Fixing = 2 x Ø8 mm screws.

L = 300 mm Weight = 0.24kg

